
OMNI DRIVE™ Maintenance Procedure

For Euro groove & Surface Mount Applications

CALDWELL


ASSA ABLOY

Step 1:

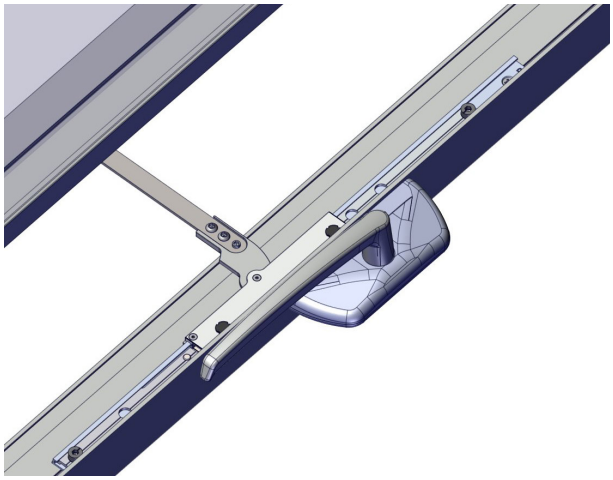

Frame side:
Use the OMNI DRIVE™ handle to open the vent.


Step 2:

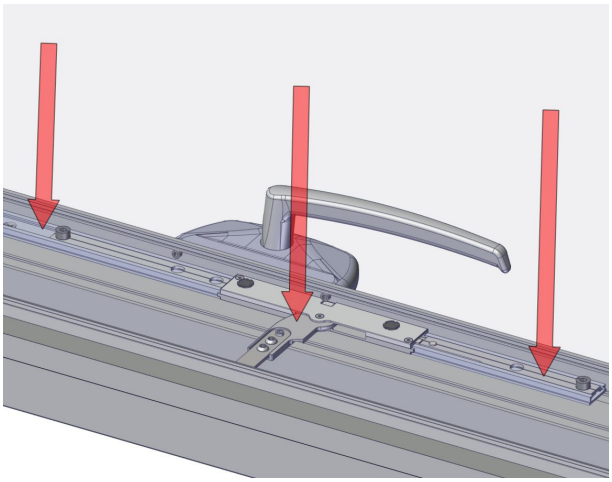

Frame side:
Clean any dirt, debris or foreign matter from the tracks, drive bars and engine reciever arm as needed.

Reapply lubrication as requested per window manufacturer recommendations.


Step 3: Euro groove

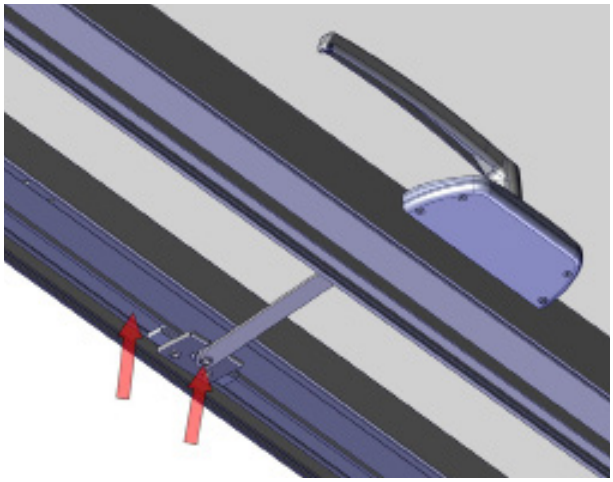

Vent side: Euro groove
On underside of vent, clean any dirt, debris or foreign matter out of the euro groove track and off shoe as needed.

Reapply lubrication as requested per window manufacturer recommendations.

Step 3: Surface Mount

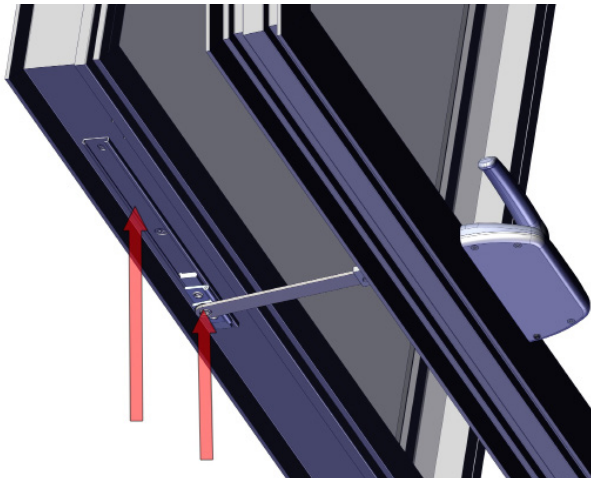

Vent side: Surface Mount
On underside of vent, clean any dirt, debris or foreign matter out of the euro groove track and off shoe as needed.

Reapply lubrication as requested per window manufacturer recommendations.