Installation Instructions & Safety Information

ASSA ABLOY

The global leader in door opening solutions

ASSA ABLOY Window Opening Control Device (WOCD)

Each WOCD shall be provided with safety information to the owner of the building in which the opening control device is installed and to the occupant in the dwelling where the opening control device is installed (or is to be installed).

⚠ WARNING

Possible Fall Hazard

- Young children may fall out of the window if the WOCD is not installed correctly.
- Install the device so that a rigid 4.0-in. diameter sphere does not pass through any space in the window opening after the WOCD is in place.
- Young children may fall out of the window if all installation instructions are not followed.
- Use recommended materials and techniques.
- Make sure that the window frame is in good condition.
- If the hinges are adjustable they must be adjusted so the minimum cavity height requirement of 0.438" is present in the installation area.
- Make sure that the WOCD is securely installed in accordance with manufacturer's instructions.
- Please consult the window manufacturer for WOCD placement information specific to your window size and weight.
- These device part numbers comply to ASTM F2090-13:
  - CP01-0021
  - CP01-0022
  - CP01-0010

All applicable building and fire codes shall be consulted before installing WOCDs. Contact local building code department or fire department for specific applicable codes. WOCDs shall be installed such that the release mechanism(s) is in conformance with local building and fire code requirements.

FOLLOW MANUFACTURER'S ASSEMBLY AND INSTALLATION INSTRUCTIONS CAREFULLY. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN THE WOCD BEING INEFFECTIVE IN CONTROLLING THE WINDOW OPENING WHICH MAY RESULT IN ACCIDENTAL WINDOW FALLS.

Installation Instructions

Open window so that the window opening is less than 4" (102mm).

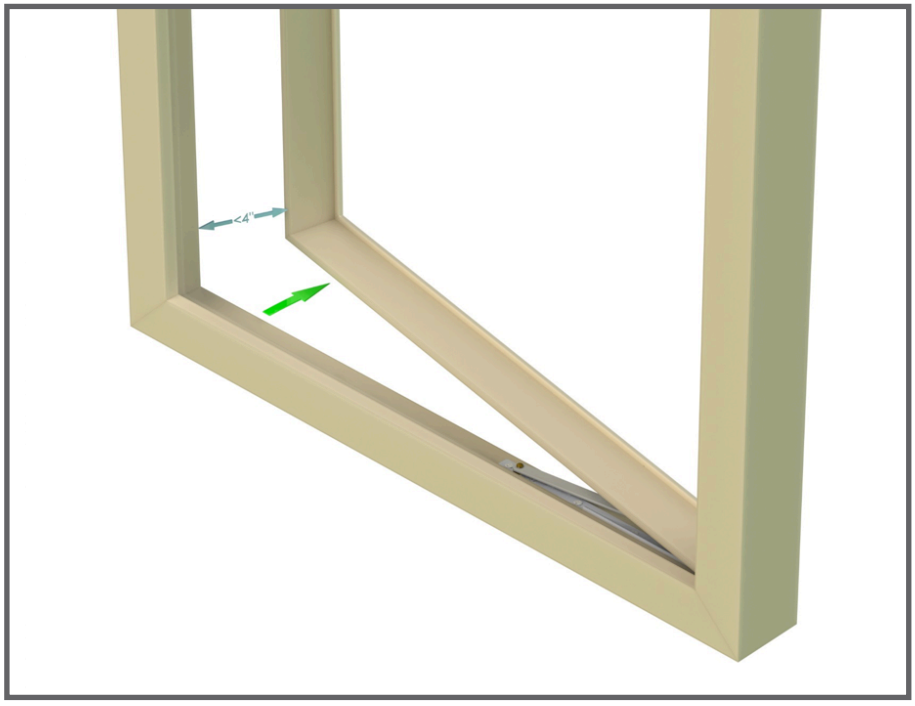

Place strike on sill. Line up screw holes with screw line.

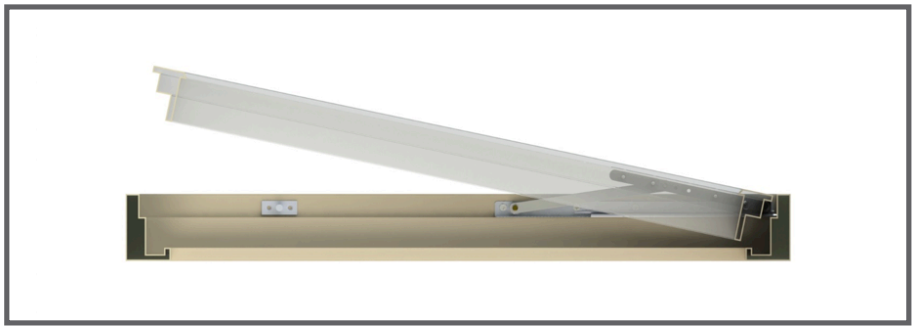

Link hook to strike.

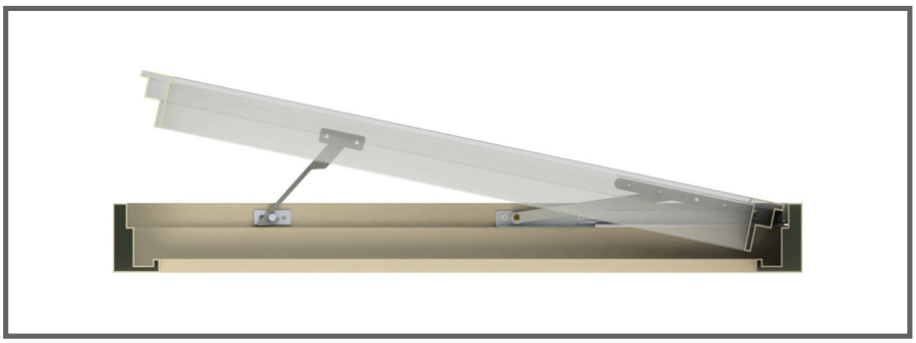

Keeping hook fully sprung, place base of hook on the sash, and slide assembly until hook base and pin base are in line with their respective screw lines. Mark the locations of the holes.

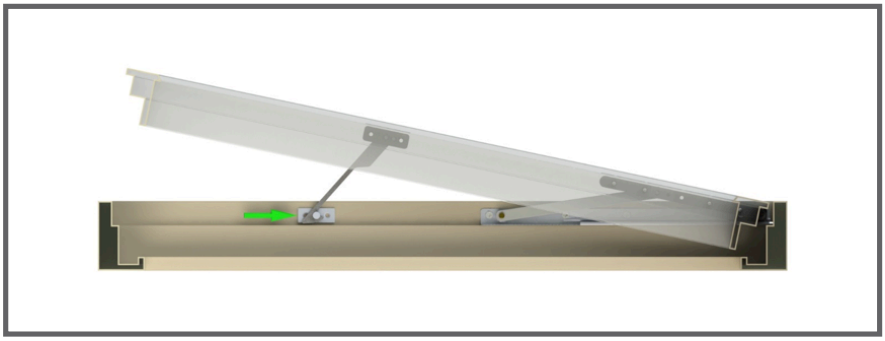

Using supplied screws, fix the strike and hook to the frame and sash.

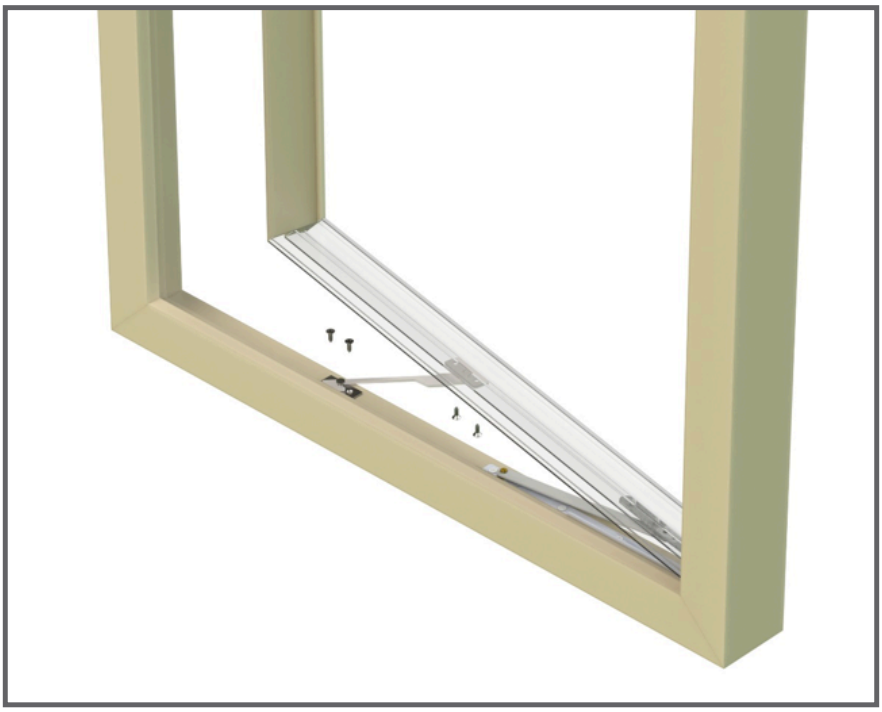

Close window fully. Ensure there are no interferences preventing proper weather sealing.

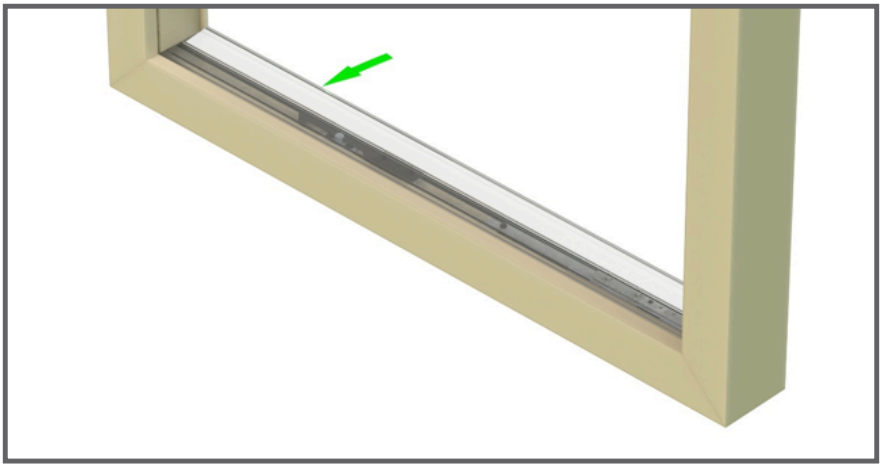

Push or operate window open.

Observe operation of WOCD.

Ensure that hook engages with strike.

Confirm that installation of device so that a rigid 4.0-in. diameter sphere does not pass through any space in the window opening after the WOCD is in place.

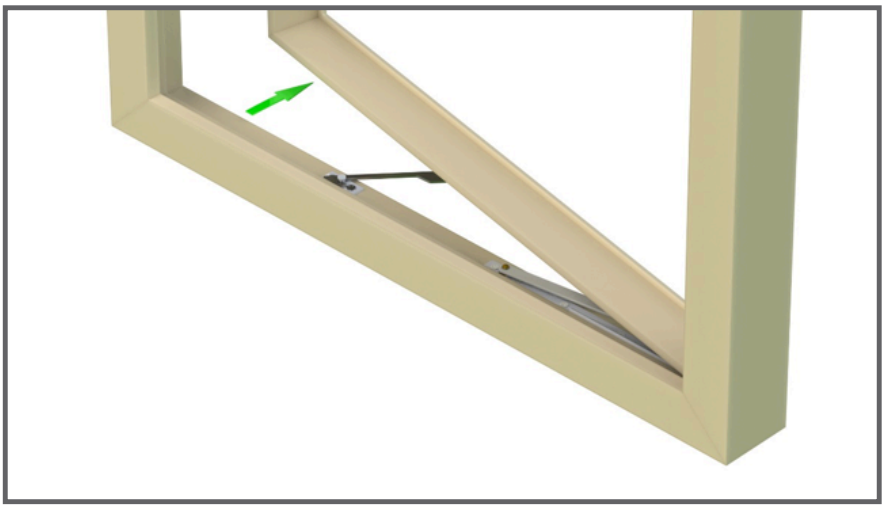

Close and lock window.

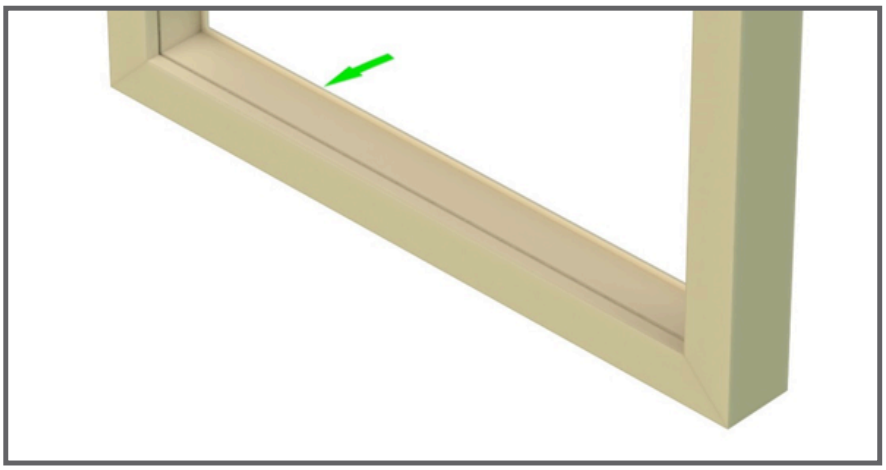

INSTALLER, LEAVE THIS SAFETY INFORMATION BEHIND FOR THE OCCUPANT OF THE BUILDING

⚠ IMPORTANT SAFETY INFORMATION

When the Window opening Control Device (WOCD) is properly installed and engaged, no space shall exist at the lowest opening portion of the window opening that would permit the passage of a rigid sphere 4.0 in (102mm) in diameter.

It is recommended that the WOCD be maintained and tested on a monthly basis (once a month) and after testing be closed securely.

It is recommended that all household members six years old and older should know how to operate the window open control device in case of an emergency.

⚠ WARNING

NO RESCUE ABOVE 75 FT (6TH FLOOR)

- Fire rescue ladder may not reach beyond 75 ft (6th floor).
- Do not rely on being rescued from windows above 75 ft (6th floor). Follow building fire escape plan.

⚠ WARNING

BLOCKS ESCAPE IN FIRE AND EMERGENCY UNLESS RELEASED

- Need to properly operate release mechanism to open WOCD. See instructions that follow for correct operation of the release mechanism.
- Never apply padlocks or devices that require a key or tool to unlock them to the release mechanism of the WOCD(s).

⚠ WARNING

POSSIBLE FALL HAZARD

- This WOCD is designed to protect against accidental operation of window by children five years and younger.
- This WOCD is not a substitute for attentive supervision of all young children.
- Keep WOCD properly engaged unless needed for use in an emergency.

Follow these instructions on how to operate the release mechanism, to fully understand the operations of the WOCD in case of an emergency.

To Open and release WOCD:

1. Unlock window and crank open.
2. Manually push hook portion of linkage outward so it does not engage with the pin.
3. Continue to crank window open fully.

In an emergency, perform procedures 1, 2 and 3 to escape.

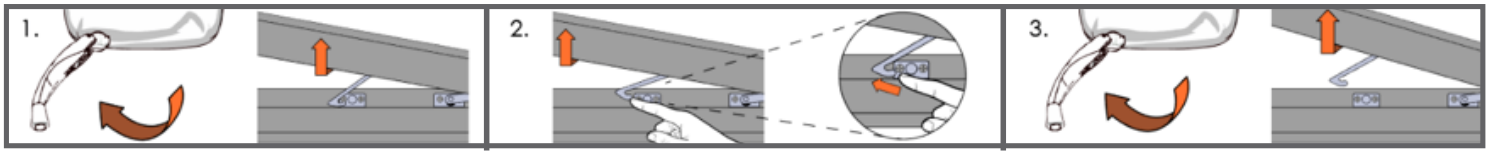

To Close window and re-engage WOCD:

1. Crank the window fully closed to re-engage the WOCD.
2. Re-open window to confirm activation and limit of window opening.
3. Crank window closed and lock the window to secure.