


REVISIONS					
REV#	E.C.N.#	DESCRIPTION	DATE	BY	APVD.

∅ .395 REF.

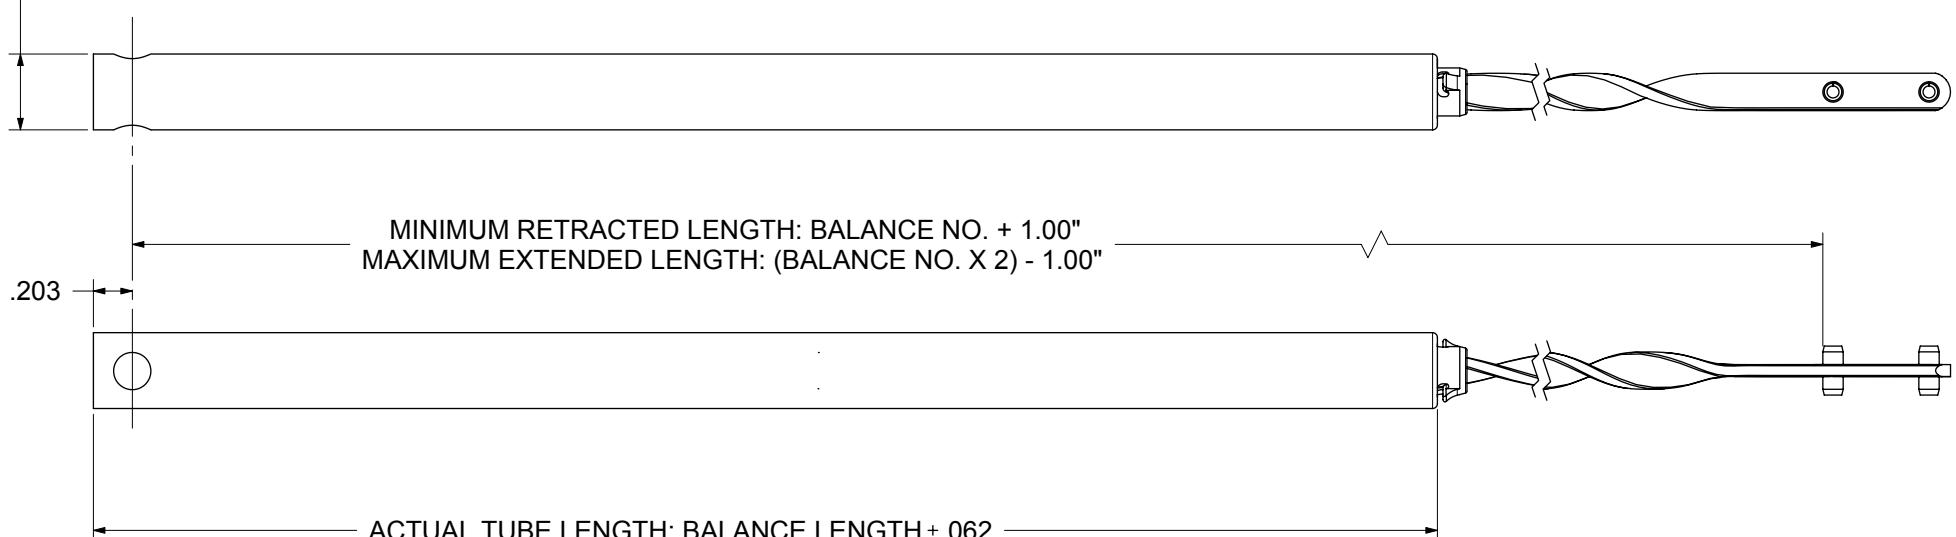

RECOMMENDED APPLICATION RANGES

THE VALUES SHOWN CONTAIN A DEGREE OF BALANCE TRAVEL PROTECTION.
THEY ARE APPROPRIATE FOR USE IN COMMERCIAL APPLICATIONS.

MATERIAL/TREATMENT/FINISH:

NOTE: DO NOT SCALE DRAWING!

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE AS FOLLOWS:

INCHES

[MILLIMETERS]

TWO DECIMAL PLACES	± .010	ONE DECIMAL PLACE	± .25
THREE DECIMAL PLACES	± .005	TWO DECIMAL PLACES	± .13
ANGULAR	± 1°	ANGULAR	± 1°
FRACTIONS	± 1/64		

DIMENSION IDENTIFICATION SYMBOLS

= LOW / MEDIUM CRITICALITY

= CRITICAL TO FUNCTION

= CRITICAL TO PROCESS

= STATISTICAL PROCESS CONTROL

LAST # USED = **XX**

THIS IS THE PROPERTY OF

CALDWELL MFG. CO.

ANY USE OR REPRODUCTION
WITHOUT AUTHORIZATION BY
THIS COMPANY IS PROHIBITED.

CALDWELL
MANUFACTURING
COMPANY

2605 MANITOU ROAD
ROCHESTER, NEW YORK

TITLE
ENHANCED 3/8 TRAVEL CHARACTERISTICS
(ENHANCED 3/8 INSULILT)

THIRD ANGLE PROJECTION	DRAWN	RML	DATE 03/7/07
	CHECKED	RML	DATE 03/9/07
	APPROVED	RML	DATE 3/12/07
A EX NO	SIZE	DWG NO	REV
	XXXXXX	SL-61A-015	0
SCALE 1:1		SHEET 1 OF 1	