

Residential Casement & Awning Window Solutions

WOCD II

Window Opening Control Device

This innovative device limits the opening of casement windows for added safety, while still allowing full window operation when needed. To disengage, simply press the red button and push downward on the red cable section while the window is partially open. To re-engage, close the window and the WOCD will automatically reset.

Product Features



Automatic Re-Engagement System

The flexible sash connector and built-in sash lifter ensure the device automatically re-engages every time the window is closed—eliminating the need for future adjustments.



Easy, Early Disengagement

The sash connector can be released before the window reaches its maximum opening, allowing for quicker and more convenient operation.



Durable, Maintenance-Friendly Design

The flexible stainless steel sash connector resists bending, even with accidental contact during cleaning or maintenance, ensuring long-term durability.



Versatile Fit & Simple Installation

The compact design fits a wide range of casement and awning windows and supports both vertical and horizontal installation. Self-locating features ensure fast, accurate installation with a proper fit every time.



Adjustable Opening Restriction

The restriction distance can be customized before or after installation, ensuring compliance with maximum allowable opening requirements for various window sizes and thicknesses.



Tested for Strength & Durability


This device meets ASTM F2090-21 standards for load capacity and cycle durability, ensuring reliable performance over time.





Residential Casement & Awning Window Solutions

WOCD II

Window Opening Control Device

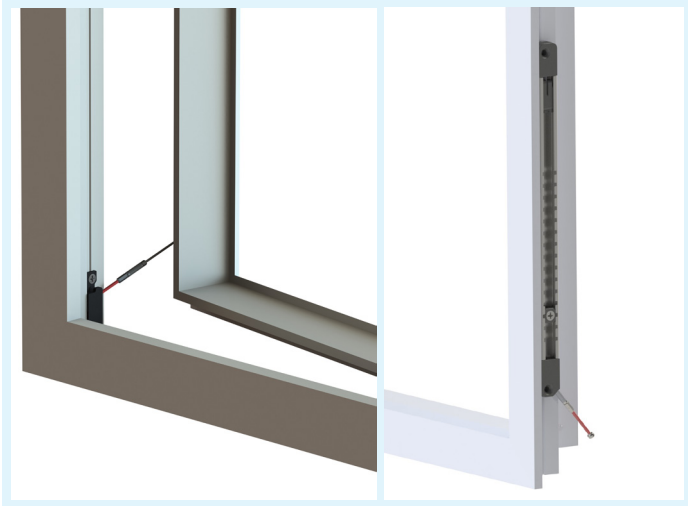

Product	Part No	Box Qty
WOCD II Kit A Left Hand Casement	CP01-0400	50
WOCD II Kit B Right Hand Casement	CP01-0410	50

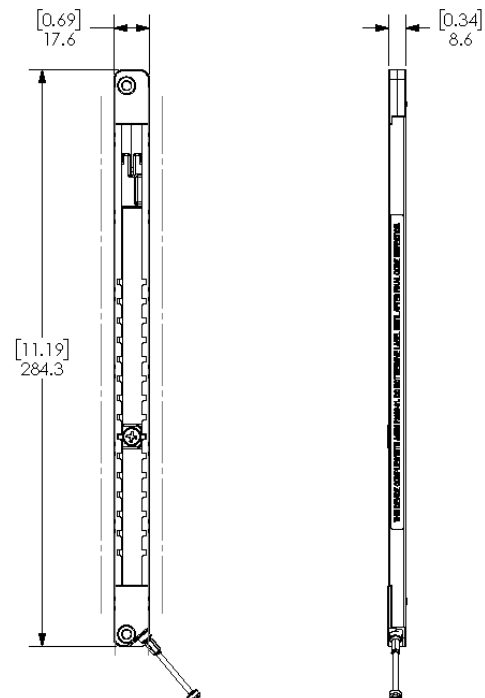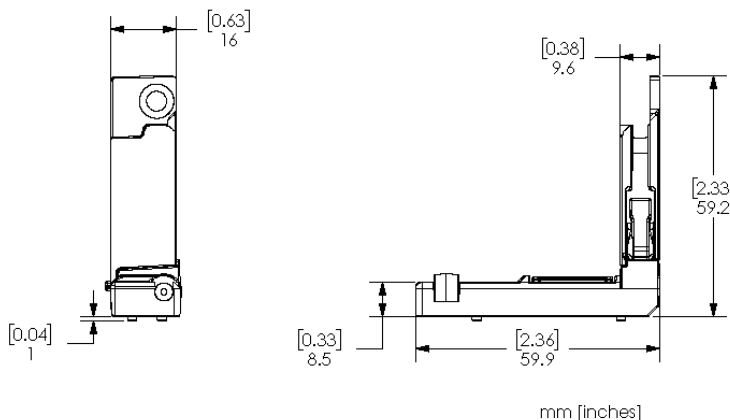

Design limitations:

- » Maximum window frame width x height: 36" (914 mm) x 72" (1,829 mm).
- » Window manufacturer must test and comply with all applicable requirements of ASTM F2090-21 for its maximum window size if larger than the above dimensions.

The WOCD shall be installed by the window manufacturer or the window manufacturer's approved installer.

Note: Sash assembly is designed for #8 flat head screws. Due to variation in window materials and design, the window manufacturer shall specify and supply the fasteners to be used. The fasteners shall meet the requirements of ASTM F2090-21.