

WOCD II

Window Opening Control Device


ASSA ABLOY

assaabloy.com

Experience a safer
and more open world

Interlock's Window Opening Control Device (WOCD) is a revolution for the residential fenestration industry.

The innovative device limits the opening of casement windows but can also be disengaged to allow the window to fully open. The function and performance are compliant to the ASTM F2090 Standard Specification for Window Fall Prevention Devices. With the window partially open, simply press the red button and then press downward on the red section of cable to disengage the device. To re-engage the limit device, simply close the window. Interlock's WOCD will automatically re-engage!

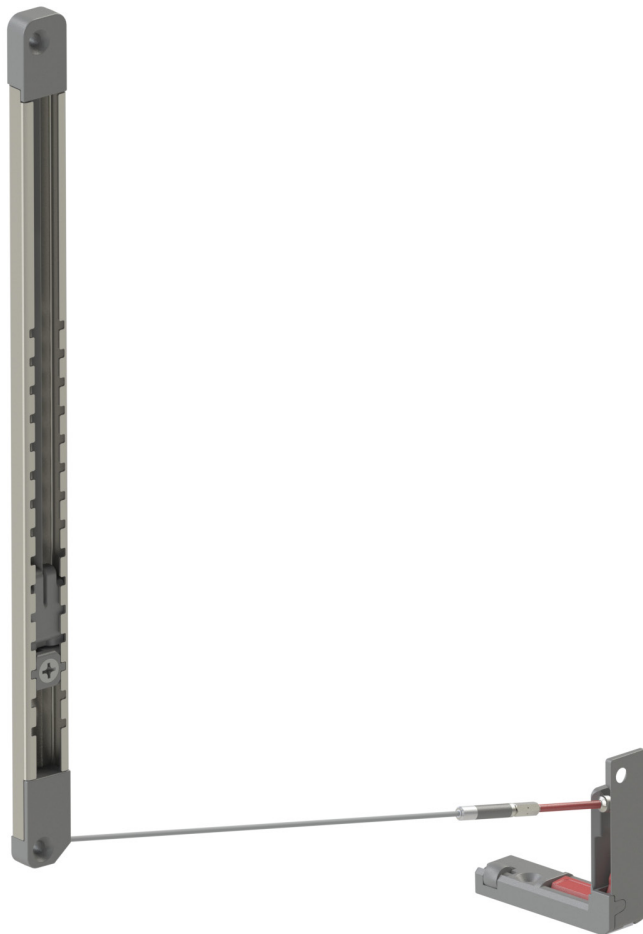

Features

- The flexibility of the Sash Connector and built-in sash lifter ensure automatic reengagement every time and no need for future adjustments.
- Faster, easier disengagement is possible because the Sash Connector can be released before the window reaches the maximum allowable opening.
- Cleaning and maintenance of an open window can be performed without additional care because the flexible, stainless steel Sash Connector will not bend due to accidental contact when disengaged.
- The compact design fits a variety of casement and awning windows and accommodates vertical or horizontal placement.
- Restriction distance can be adjusted before or after installation to ensure any window thickness is limited to the maximum allowable opening.
- Installation is simple thanks to self-locating features providing a proper fit every time.
- Tested load capacity and cycle durability meet the requirements of ASTM F2090-21.


WOCD II

Window Opening Control Device



ASSA ABLOY

assaabloy.com

Experience a safer
and more open world

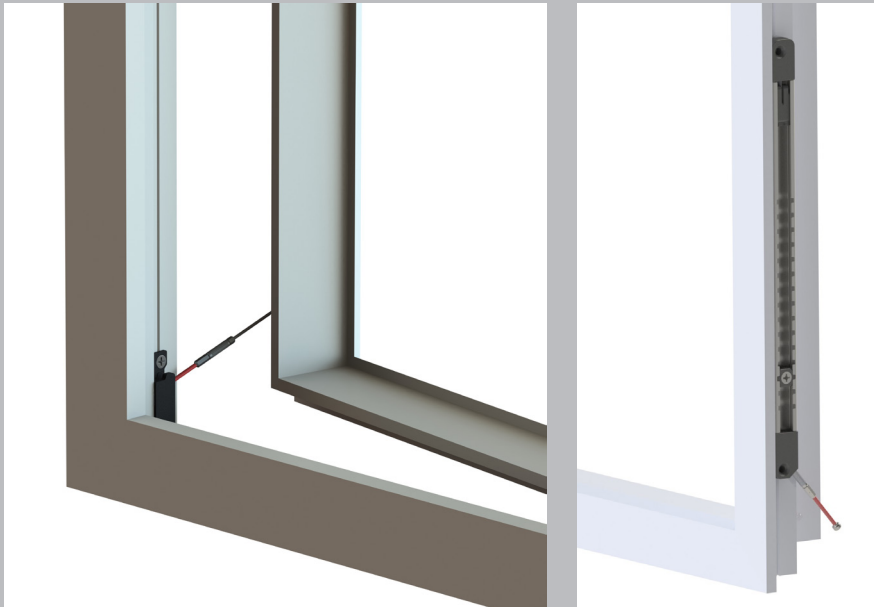

Product	Part No	Box Qty
WOCD II Kit A Left Hand Casement	CP01-0400	50
WOCD II Kit B Right Hand Casement	CP01-0410	50

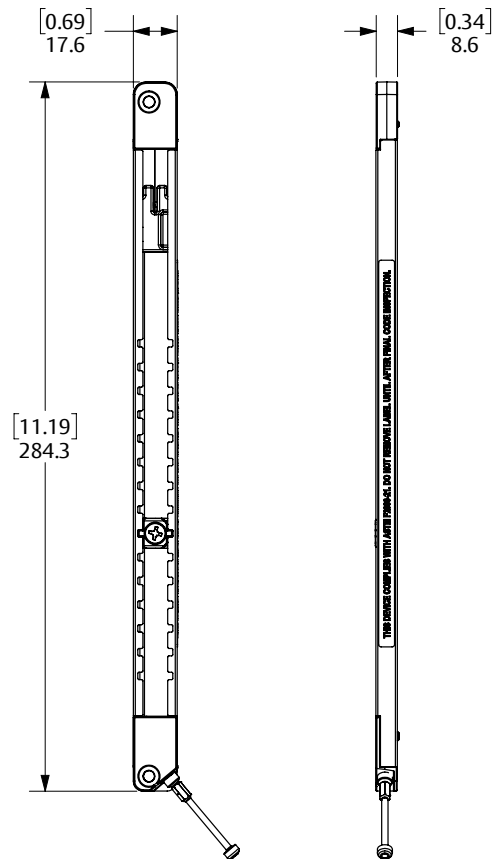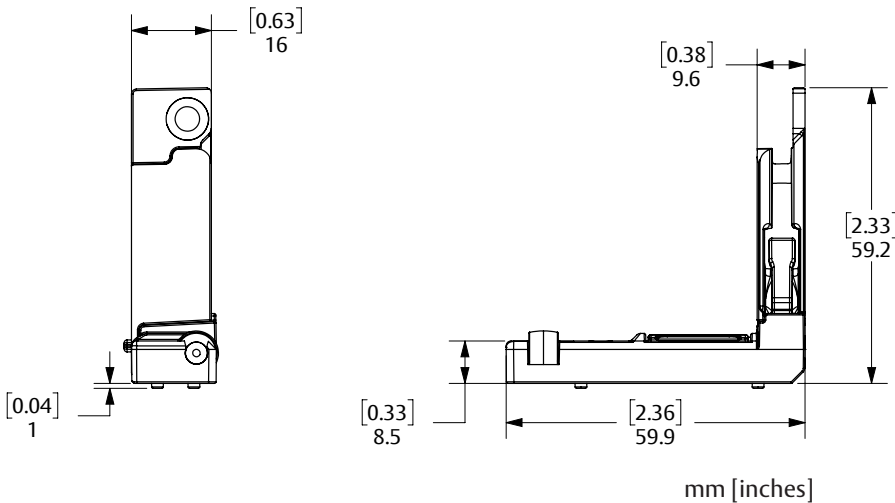

Design limitations:

- Maximum window frame width x height: 36" (914 mm) x 72" (1,829 mm)
- Window manufacturer must test and comply with all applicable requirements of ASTM F2090-21 for its maximum window size if larger than the above dimensions.

The Interlock WOCD shall be installed by the window manufacturer or the window manufacturer's approved installer.

Note: sash assembly is designed for #8 flat head screws. Due to variation in window materials and design, the window manufacturer shall specify and supply the fasteners to be used. The fasteners shall meet the requirements of ASTM F2090-21.

www.assaabloyfenestration.com
888.347.7771

INTERLOCK
ASSA ABLOY